



TEC-ONE

AS NO ONE



TEC-ONE 1000



www.tec-one.it



Gaskets in Fluorinated Hydrocarbon

Ideal with oils and mineral fats silicone based, animal and vegetable oils, aliphatic hydrocarbons, aromatic hydrocarbons, very good resistance to weather, ozone, oxygen and sunlight.

Polypropylene Head

Oxide removal

Cleaning tire rims

Inside car cleaning

Cleaning car bodies


Glass cleaning

Cleaning carpeting and wall-coverings

Cleaning bathroom fixtures



Oxide removal.

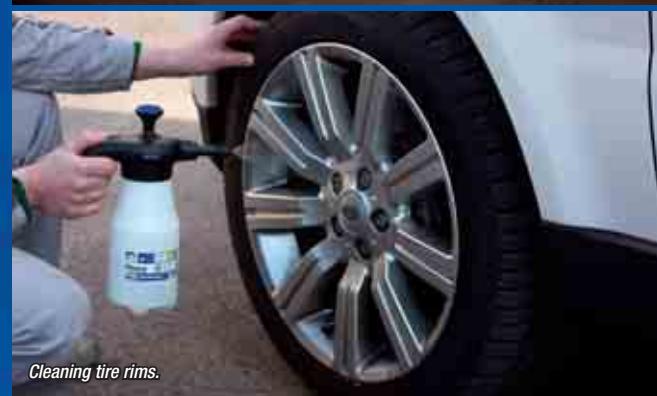

Cleaning tire rims.



Inside car cleaning.

Durable

TEC-ONE 1000 FPM has fluorocarbon rubber gaskets and the structural parts of the head are made from strong, totally-recyclable polypropylene.

Designed to satisfy the needs of a demanding market where extreme performance is the order of the day.

This pump is highly-resistant to corrosive products, silicone mineral oils (vegetable and animal), hydraulic and synthetic fluids, many acids and many organic solutions.

TEC-ONE 1000

EPDM

www.tec-one.it



Gaskets in Ethylene-Propylene-Diene
Ideal with glycol-based hydraulic fluids and organic and inorganic acids, detergents, solutions of sodium and potassium, oxygenated solvents (ketones and esters), and atmospheric agents.

Polypropylene Head

Washing brakes

Cleaning garages and workshops

Cleaning and regenerating tires

Truck cleaning

Cleaning tire rims

Cleaning car bodies

Cleaning glass

Cleaning inside the car

Cleaning carpeting and wall-coverings

Cleaning bathroom fixtures



Mission possible

TEC-ONE 1000 EPDM has gaskets made of Ethylene-Propylene-Diene rubber and the structural parts of the head are made of strong, totally-recyclable polypropylene. It was designed to meet the needs of a market that uses chemicals based on alkalines (sodium, potassium, lithium, etc.). Widely used for cleaning brakes, it is specifically used with detergents for washing cars, liquid waxes, glass cleaners and disinfectants.



Washing brakes.



Cleaning garages and workshops.



Cleaning and regenerating tires.

TEC-ONE 1000



www.tec-one.it



Gaskets in Fluorinated Hydrocarbon

Ideal with oils and mineral fats silicone based, animal and vegetable oils, aliphatic hydrocarbons, aromatic hydrocarbons, very good resistance to weather, ozone, oxygen and sunlight.

Nylon Head

Removing tar

Cleaning engines and frames

Cleaning engine seals

Inside car cleaning



Removing tar.



Cleaning engines.

Super tough

TEC-ONE 1000 FPM has fluorocarbon rubber gaskets and the structure of the head is very strong nylon.

Designed for a market that uses aliphatic and partly aromatic hydrocarbons.

Often used with benzene and fuels, for example, to remove tar from equipment. It is also used with lubricants, such as in mechanical workshops.



Lubricating mechanical parts.


TEC-ONE 1000

Safety valve

Automatic depressurization at ± 3 bar.
It can be used also manually for releasing the pressure, necessary prior to opening the container.

Anti-jump button

Ergonomic surface to facilitate dispensing.

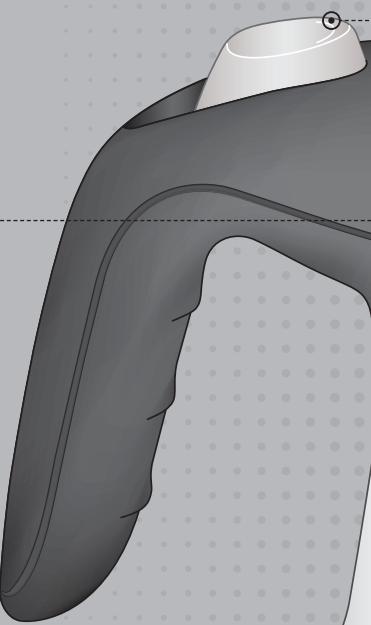

Pumping rod


Made of strong plastic material resistant to most chemicals.

Easy-to-handle bottle

Its particular shape makes it easily adapted for multi-use carts.

Protection Cap

Protects the non return valve from direct contact with the liquid prolonging the life of the pump.

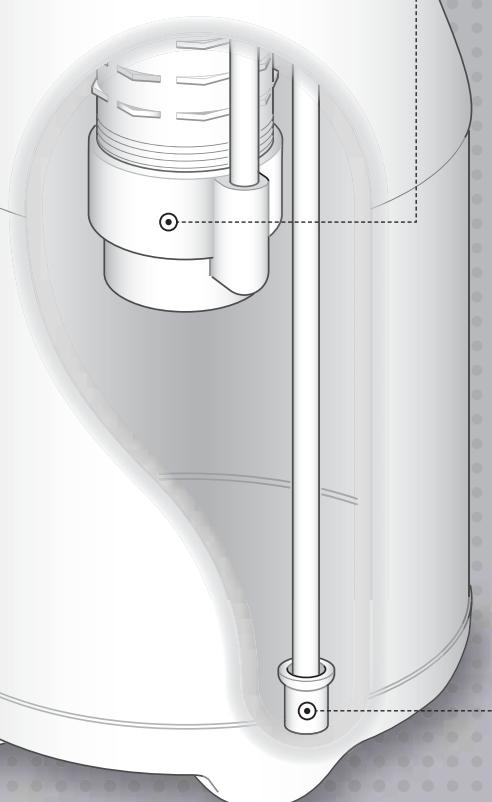

Filter

Prevents the passage of solid particles that could damage the pump.


Solid base

Four feet assure a stable base.



for manufacturing defects

△ Epoca recommends that you test the compatibility between the liquid products to be used and the components of the pump, including the types of gaskets.

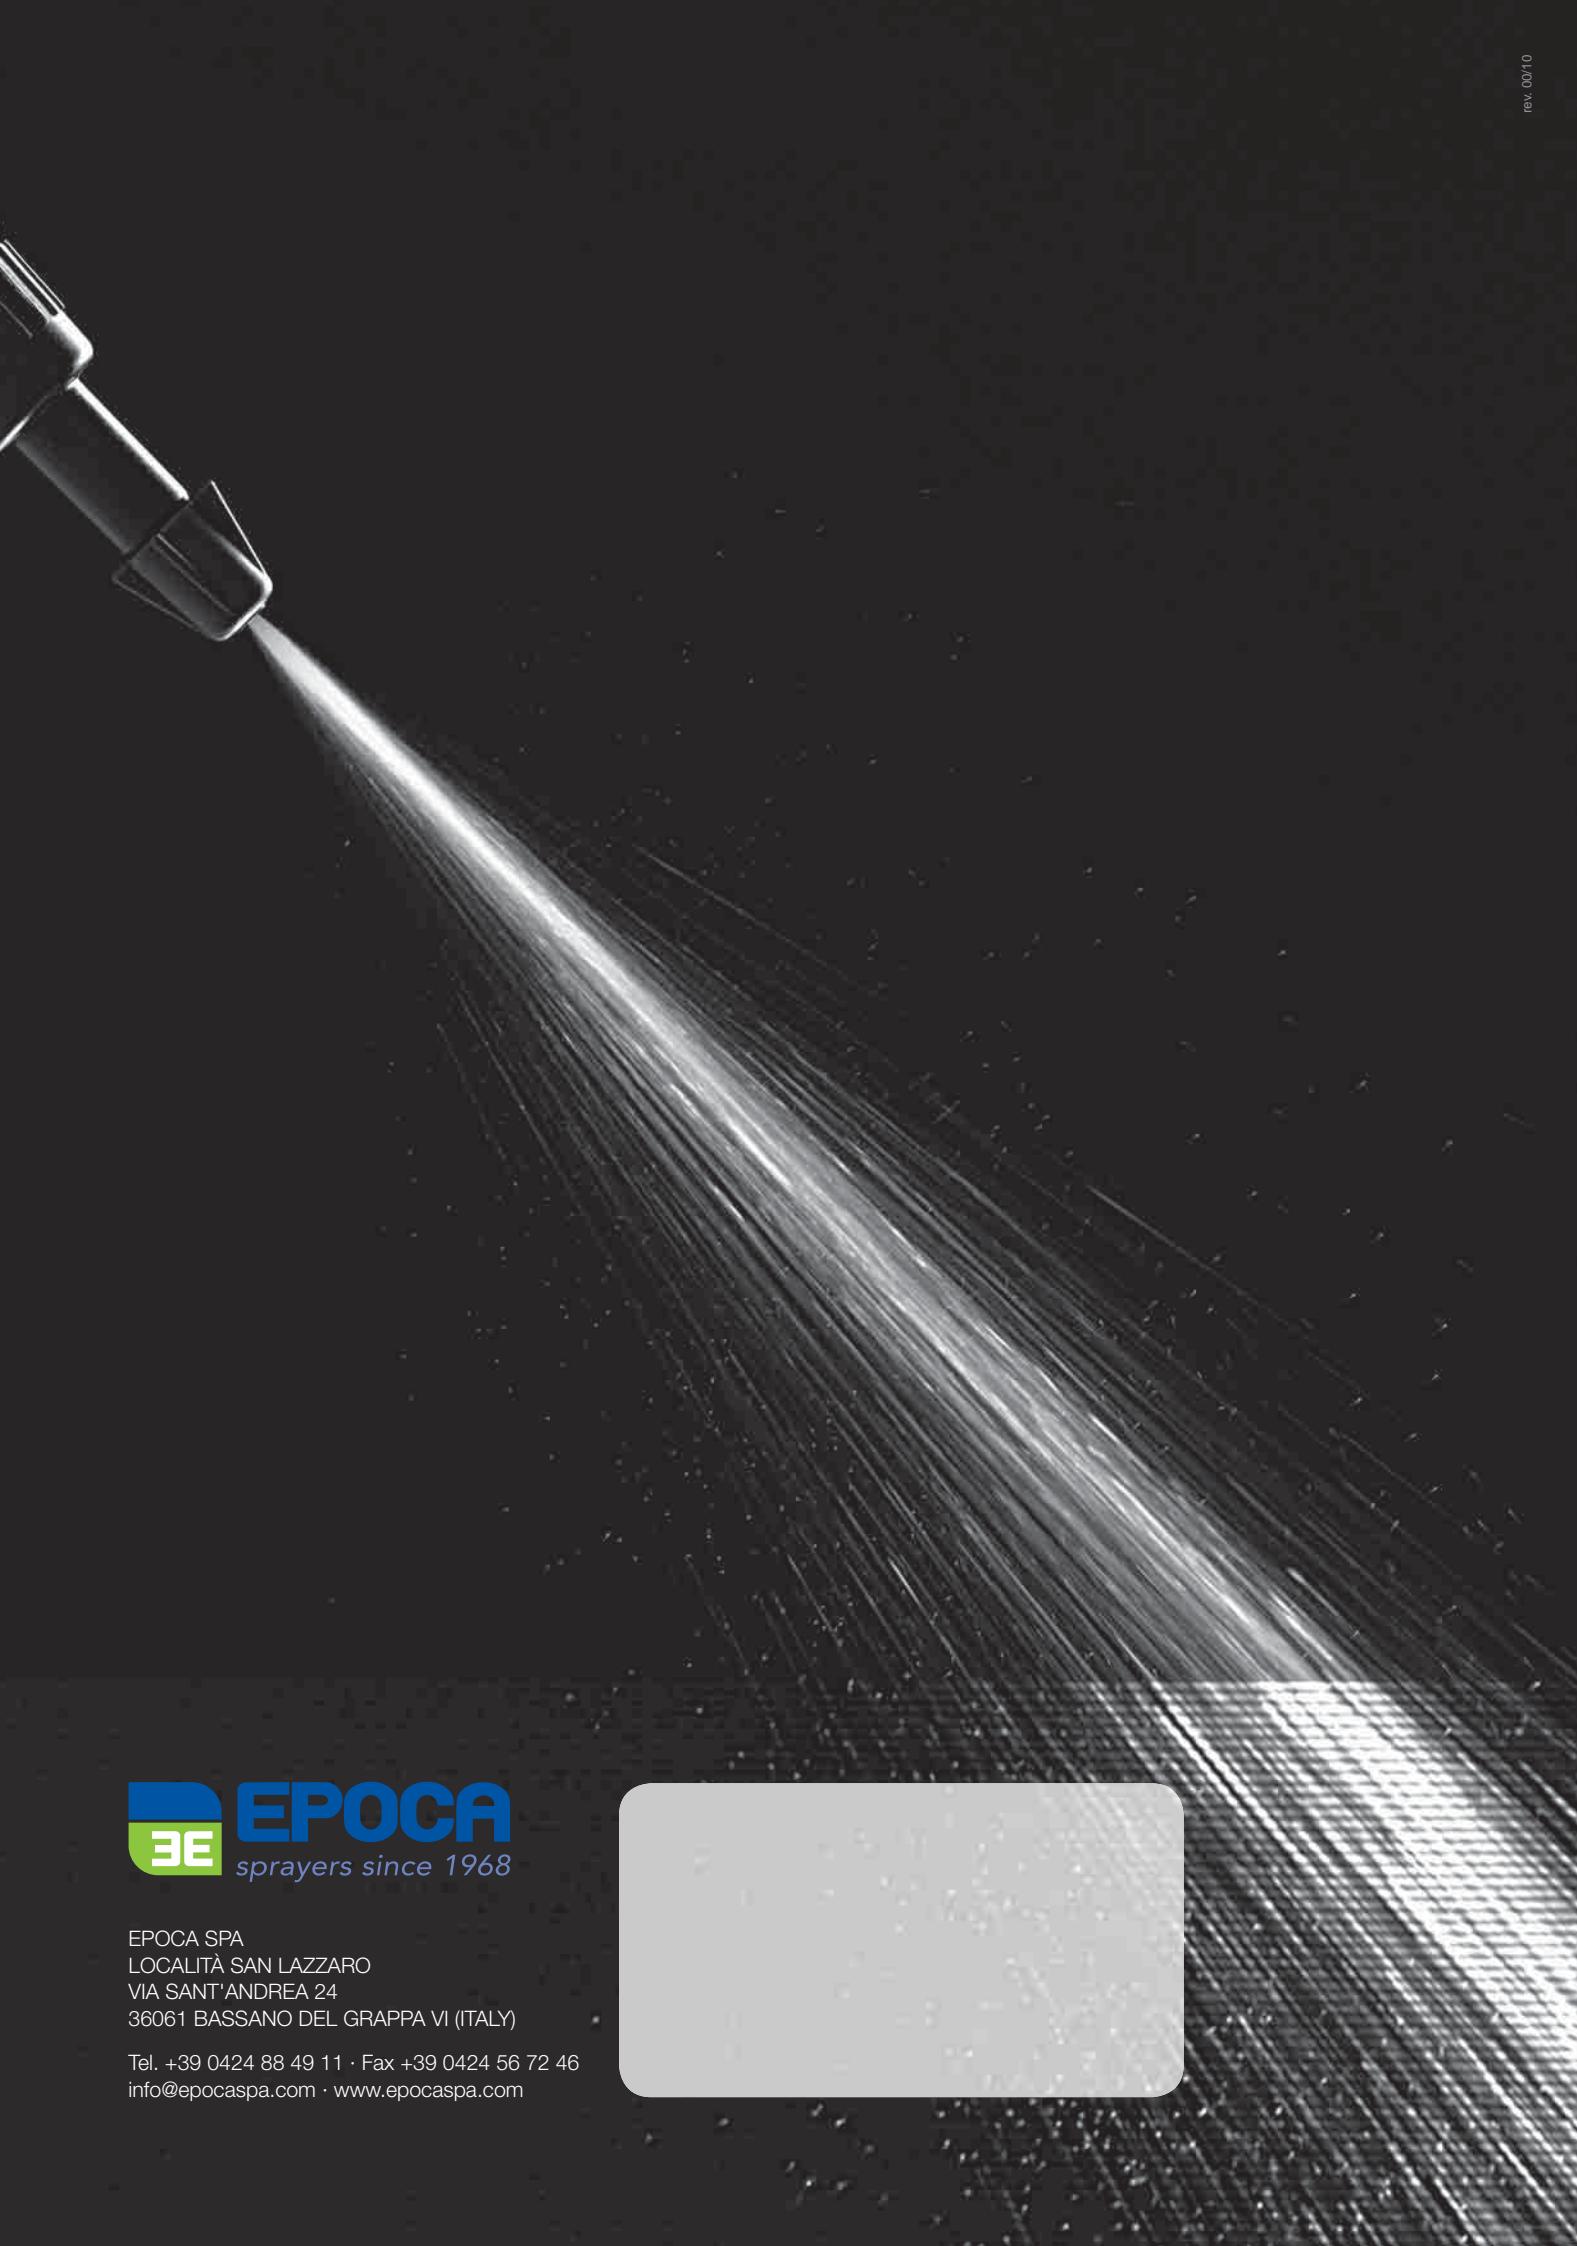

EPOCA SPA
LOCALITÀ SAN LAZZARO
VIA SANT'ANDREA 24
36061 BASSANO DEL GRAPPA VI (ITALY)

Tel. +39 0424 88 49 11 · Fax +39 0424 56 72 46
info@epocaspa.com · www.epocaspa.com